

ANNEX VIII: Equipment Datasheets



BIFACIAL DUAL GLASS MONOCRYSTALLINE MODULE

PRODUCT: TSM-DEG21C.20

POWER RANGE: 645-665W

665W

MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.4%

MAXIMUM EFFICIENCY



High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components



High power up to 665W

- Up to 21.4% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability



- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature
- Up to 25% additional power gain from back side depending on albedo

Trina Solar's Vertex Bifacial Dual Glass Performance Warranty

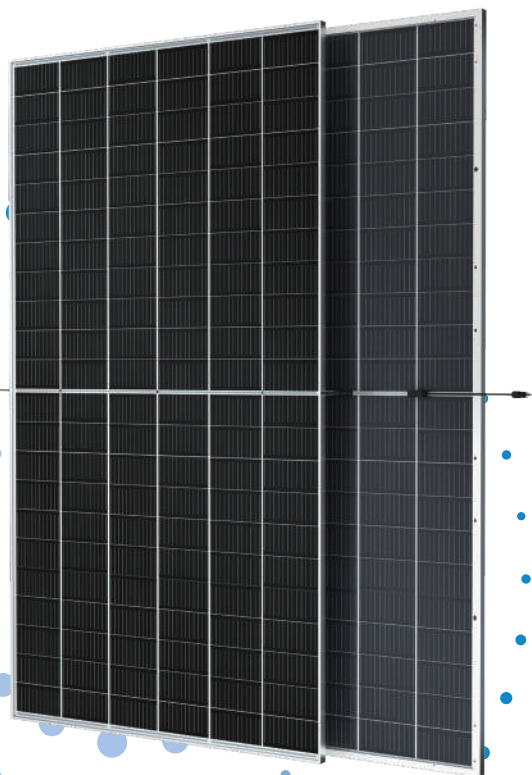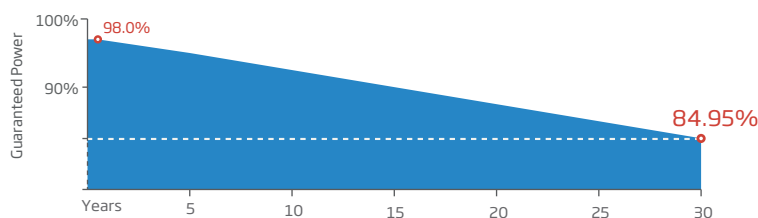


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716/UL61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System


DIMENSIONS OF PV MODULE(mm)

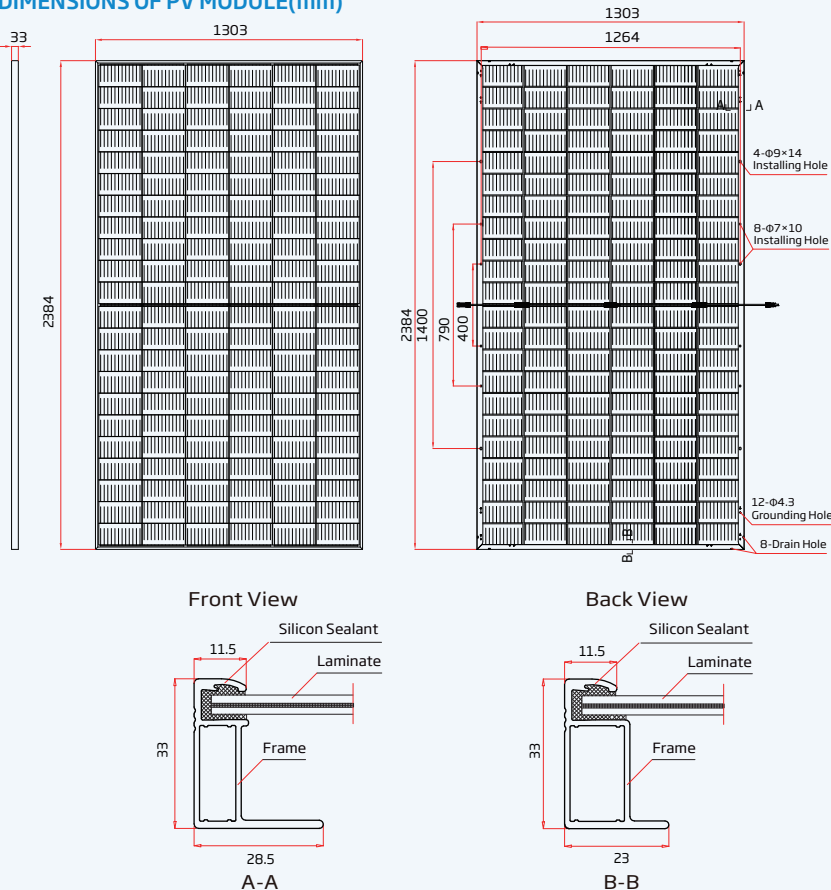


I-V CURVES OF PV MODULE(650 W)

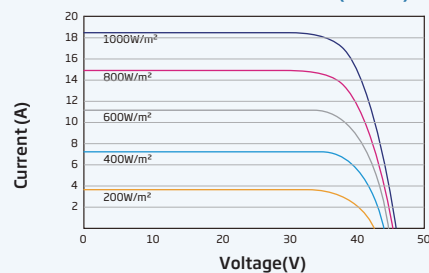

P-V CURVES OF PV MODULE(650W)

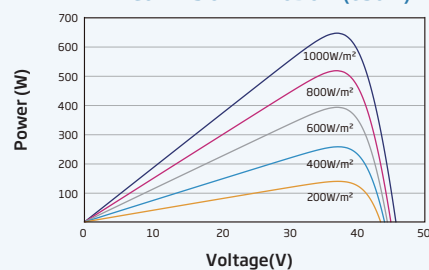

I-V CURVES OF PV MODULE(650 W)

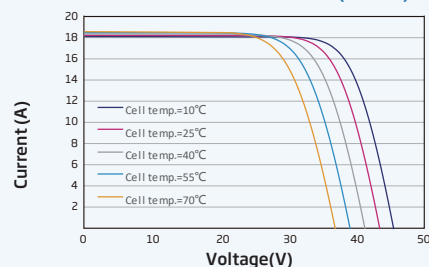

ELECTRICAL DATA (STC)

Peak Power Watts-P _{MAX} (Wp)*	645	650	655	660	665
Power Tolerance-P _{MAX} (W)	0 ~ +5				
Maximum Power Voltage-V _{MPP} (V)	37.5	37.7	37.9	38.1	38.3
Maximum Power Current-I _{MPP} (A)	17.23	17.27	17.31	17.35	17.39
Open Circuit Voltage-V _{OC} (V)	45.3	45.5	45.7	45.9	46.1
Short Circuit Current-I _{SC} (A)	18.31	18.35	18.40	18.45	18.50
Module Efficiency η_m (%)	20.8	20.9	21.1	21.2	21.4

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power -P _{MAX} (Wp)	690	696	701	706	712
Maximum Power Voltage-V _{MPP} (V)	37.5	37.7	37.9	38.1	38.3
Maximum Power Current-I _{MPP} (A)	18.44	18.48	18.52	18.56	18.60
Open Circuit Voltage-V _{OC} (V)	45.3	45.5	45.7	45.9	46.1
Short Circuit Current-I _{SC} (A)	19.59	19.63	19.69	19.74	19.79
Irradiance ratio (rear/front)	10%				

Power Bifaciality: 70±5%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	488	492	495	499	504
Maximum Power Voltage-V _{MPP} (V)	34.9	35.1	35.2	35.4	35.6
Maximum Power Current-I _{MPP} (A)	13.98	14.01	14.05	14.10	14.16
Open Circuit Voltage-V _{OC} (V)	42.7	42.9	43.0	43.2	43.4
Short Circuit Current-I _{SC} (A)	14.75	14.79	14.83	14.87	14.91

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	132 cells
Module Dimensions	2384×1303×33 mm (93.86×51.30×1.30 inches)
Weight	38.3 kg (84.4 lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	33mm(1.30 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	MC4 EV02 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.34%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	35A

WARRANTY

12 year Product Workmanship Warranty
30 year Power Warranty
2% first year degradation
0.45% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 33 pieces
Modules per 40' container: 594 pieces

SG2500HV/SG3000HV

Turnkey Station for 1500 Vdc System



High Yield

- Efficient three-level topology, max. system efficiency up to 99 %
- 1 or 2 MPPT, wide MPP voltage range
- Full power operation without derating at 50 °C
- One inverter unit fails, the other unit continues operation



Easy O&M

- Integrated zone current monitoring function for fast trouble shooting
- Module design and front service, easy for maintenance
- DC circuit breaker design for convenient maintenance



Saved Investment


- DC 1500 V system, low system initial investment
- 10-foot container design, no need to build extra inverter house
- Integrated LV auxiliary power supply




Grid Support

- Compliance with standards: IEC 62109, IEC 61727, IEC 62116, CE, G59/3
- Low/High voltage ride through (L/HVRT)
- Active & reactive power control and power ramp rate control

Circuit Diagram

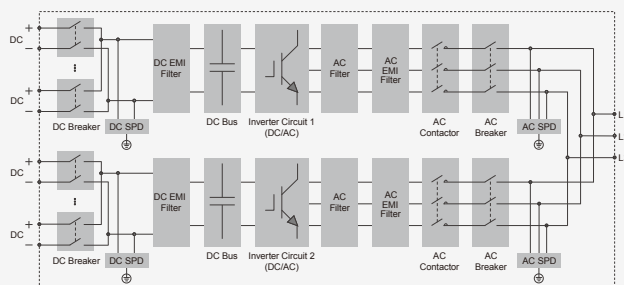

Efficiency Curve

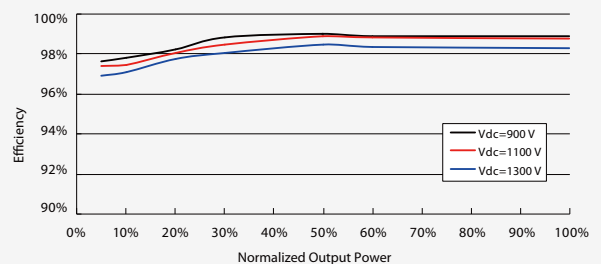

Input (DC)	SG2500HV	SG3000HV
Max. PV input voltage	1500V	
Min. PV input voltage / Startup input voltage	800 V / 840 V	900 V / 940 V
MPP voltage range for nominal power	800 – 1300 V	900 – 1300 V
No. of independent MPP inputs	1 or 2	
No. of DC inputs	16 – 24	
Max. PV input current	3508 A	
Max. DC short-circuit current	4210 A	
Output (AC)		
Nominal AC power	2500 kW (at 50 °C)	3000 kW (at 50 °C)
Max. AC output power at PF=1	2750 kW (at 45 °C)	3000 kW (at 50 °C)
Max. AC apparent power	2750 kVA (at 45 °C)	3000 kVA (at 50 °C)
Max. AC output current	2886 A	
Nominal AC voltage	550 V	600 V
AC voltage range	440 – 632 V	480 – 690 V
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
THD	< 3 % (at nominal power)	
DC current injection	< 0.5 % I _n	
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	3 / 3	
Efficiency		
Max. efficiency / Euro. efficiency	99.0 % / 98.7 %	
Protection		
DC reverse connection protection	Yes	
DC input protection	Circuit breaker	
AC output protection	Circuit breaker	
Overvoltage protection	DC Type II / AC Type II	
Grid monitoring / Ground fault monitoring	Yes / Yes	
Insulation monitoring	Yes	
Overheat protection	Yes	
Anti-PID function	Optional	
General Data		
Dimensions (W*H*D)	2991*2591*2438 mm	
Weight	5.9 T	
Isolation method	Transformerless	
Degree of protection	IP54	
Auxiliary power supply	220 Vac, 2 kVA / Optional: 380 Vac, up to 15 kVA	
Operating ambient temperature range	-35 to 60 °C (> 50 °C derating)	
Allowable relative humidity range (non-condensing)	0 – 95 %	
Cooling method	Temperature controlled forced air cooling	
Max. operating altitude	4500 m (> 3500 m derating)	4000 m (> 2000 m derating)
Display	Touch screen	
Communication	Standard: RS485, Ethernet; Optional: optical fiber	
Compliance	CEA, IEC 62109, IEC 61727, IEC 62116, IEC 60068, IEC 61683, CE, G59/3	
Grid support	LVRT, HVRT, active & reactive power control and power ramp rate control	
Type designation	SG2500HV-10	SG3000HV-10

